



DUNE 600x600 mm EZI Grip

EZIGRIPTM
Smooth When Dry Grip When Wet

JURA


Porcelain Tile

A NATURAL MIXTURE OF
LIMESTONE AND
QUARTZITE IN AN ELEGANT
AND MODERN STYLE.



The remarkable EZIGrip tile surface possesses a true Non-Slip property when wet, without compromising the soft, easy, and smooth texture in appearance, touch, and feel when dry. The transformative functionality of these tiles facilitates seamless transitions between multiple areas, making them easy to maintain in the long term and simplifying the selection process with confidence.

It is Easy, It is safe – It is EZIGrip.

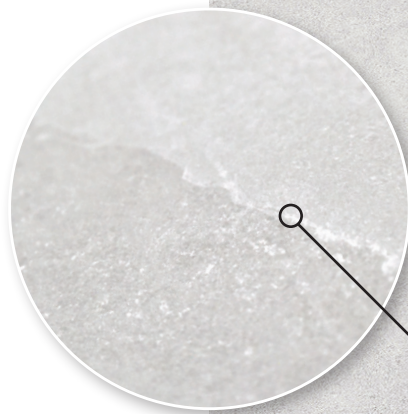

The micro finish add a subtle texture to the tile, providing a low-gloss appearance.







TOP / **SUNRISE** 1200X600 mm EZIGrip™
BOTTOM / **DUNE** 600X600 mm EZIGrip™



SUNRISE

1200x600x10mm



600x600x10mm



600x300x10mm



DUNE

1200x600x10mm












600x600x10mm



600x300x10mm

Name	Product Code	Nominal Size	Finish	Faces	Pc/Box
Jura Sunrise	GP-JU-SRE6030E	600x300	EZIGrip (P4)	18	8
Jura Sunrise	GP-JU-SRE6060E	600x600	EZIGrip (P4)	9	4
Jura Sunrise	GP-JU-SRE12060E	1200x600	EZIGrip (P4)	6	2
Jura Dune	GP-JU-DUN6030E	600x300	EZIGrip (P4)	18	8
Jura Dune	GP-JU-DUN6060E	600x600	EZIGrip (P4)	9	4
Jura Dune	GP-JU-DUN12060E	1200x600	EZIGrip (P4)	6	2

TECHNICAL SPECIFICATIONS			RECOMMENDED APPLICATIONS	
 Water Absorption (ISO10545-3)	≤ 0.5% (Result 0.06%)	 Chemical Resistance (ISO10545-13)	PASS (A-LA-HA)	Exterior Wall <input checked="" type="checkbox"/>
 Breaking Strength (ISO10545-4)	PASS ≥ 1300 N	 Stain Resistance (ISO10545-14)	PASS Class 5	Interior Wall <input checked="" type="checkbox"/>
 Modulus of Rupture (ISO10545-4)	PASS ≥ 35 N/MM ²	 Slip Resistance (AS/NZS 4586 Appendix A, D)	Matt Finish	Residential Floor <input checked="" type="checkbox"/>
 Abrasion Resistance (ISO10545-7)	CLASS 4	▪ Oil Ramp	R11	Commercial / External Floors # <input checked="" type="checkbox"/>
 Frost Resistance (ISO10545-12)	PASS	▪ Wet pendulum	P4	 Shade Variation V3

Subject to local slip resistance regulations for area of use or as recommended by Standard Australia guide HB 198:2014